

Removable Electrical Actuator (Bridge Rectifier)

The removable electrical actuator locates to the top of the container valve. 24 v dc is required for solenoid operation. Provision is made for the connection of a manual actuator to the top of the actuator assembly. Due to the design of the bridge rectifier it will operate regardless of how it is wired up; the positive supply from control panel can be connected to either terminal 1 or 2 with the reverse for the negative supply.

The electrical actuator has a life span of 10 years from manufacture after which it must be replaced. The date of manufacture is indicated on the unit's label.

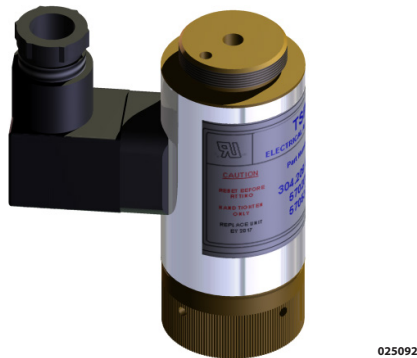


Figure 13 - Electrical Actuator - Bridge Rectifier (Part No. 304.209.001)

Technical Information

Body:	Mild Steel & Dull Nickel
Swivel nut:	Brass CZ121
Actuation Pin:	Stainless Steel
Actuation Type:	Latching
Reset Requirement:	Manually via Reset Tool supplied
Connection:	1 in. BSPP Brass
Nominal Voltage:	24 v dc
Nominal Current:	0.25 A
Max. Monitoring Current:	25 mA
Manual Actuation Force:	50 N (11.24 lbf)
Nominal Pin Travel:	4.4 mm (0.17 in.)
Electrical connection:	3-pin plug connector
Back EMF Protection:	Bridge Rectifier
Certification:	UL Recognised
Overall Size:	104mm (L) x 44mm (Dia) (4.09 in. (L) x 1.73 in. (Dia))
Weight:	0.95 kg (2.09 lb)